

# B9136 / B9125 / B9110 / B9100 Copier/Printer

More beautiful, more powerful. Evolving monochrome on-demand printing with proven technologies.



# Advanced print quality, productivity and finishing process give strong support for monochrome POD\* business.

\* Print On Demand: To print the quantity you need, when you need it.

- No.1 market share for 5 consecutive years in mono production products.\*1  
(IDC, 2012 - 2016, World Wide Monochrome Laser cut sheet products, 91ppm+)
- Outstanding print speed of 136 ppm\*2.
- High Capacity Feeders and High Capacity Stacker make continuous mass printing possible.
- Offering the latest finisher lineup. Cover insertion, three-sided trim, and saddle stitched booklet with square fold supported.
- Simple Image Quality Adjustment (SIQA) makes alignment adjustment easy.
- Equipped with various copy and scan functions useful for office operation.
- Possible to register optimal print settings for each paper type.

\*1: Worldwide Hardcopy Peripherals Tracker 2017Q3 Monochrome Laser, A3, Cut sheet, Monochrome Laser 91+ppm, Light Production, Mid Production, Production Share by Company.

\*2: For B9136 Copier/Printer with A4 LEF. 125 ppm for B9125 Copier/Printer, 110 ppm for B9110 Copier/Printer, and 100 ppm for B9100 Copier/Printer.



## Productivity & Stability

On-demand press with high productivity and stability.


### TECHNOLOGIES SUPPORTING HIGH-SPEED PRINTING

High-speed continuous printing of 136 ppm\*1 has been realised for both 1-sided and 2-sided printing.

Reliable fusing on paper transported in high-speed is now possible with EA-Eco LGK\*2 toner that allows fusing at lower temperature than existing models and a roll type fusing unit providing constant heat supply.

\*1: For B9136 Copier/Printer with A4 LEF on continuous printing of the same original document.


\*2: EA: Emulsion Aggregation LGK: Low Gloss Kuro (Black)

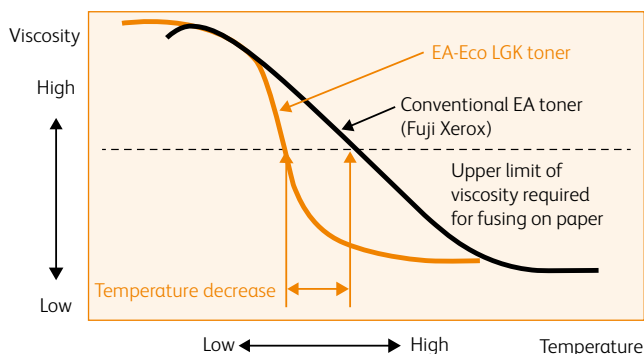

### STABLE PAPER TRANSPORT

Wide turning angles in paper path provide stable and speedy paper transport. This device has a good resistance against paper jam by adopting vertical paper inversion mechanism for 2 sided printing to reduce curves in the paper path.

In addition, there is less impact caused by heat generated by fused paper on the transfer mechanism and it hardly causes troubles with paper path and image quality.

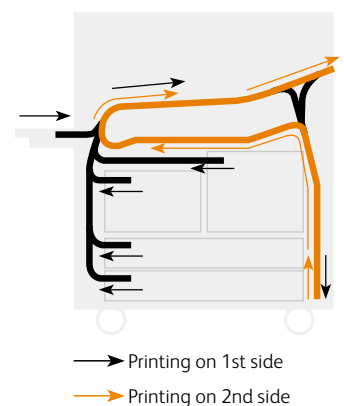

### CONTINUOUS MASS PRINTING ENABLED

You can enjoy seamless operation at continuous mass printing as cartridge replacement and paper refill can be done while printing is in progress. A single high capacity toner cartridge can yield approximately 71500 pages\* for printing.

\* A4 LEF size, area coverage 6% at continuous printing. Reference of Fuji Xerox test criteria.



## Quality

Exceptionally beautiful, high quality printing.

### HIGH RESOLUTION PRINTING OF 2400 × 2400 DPI

The heart of the printer, ROS\*<sup>1</sup>, uses VCSEL\*<sup>2</sup> as a light source. It enables printing at 2400 × 2400 dpi high resolution by drawing images simultaneously with 32 laser beams.

\*1: Raster Output Scanner

\*2: Vertical Cavity Surface Emitting Laser

### EA-ECO LGK\* TONER FOR HIGH IMAGE QUALITY

EA-Eco LGK toner with extremely small particle size of 6.5 microns allows reproduction of photograph gradation in a smooth and beautiful way, density uniformity in figures, and small text clearly. It also produces easy-to-read printed text with less glare which is also easy on your eyes.

\* EA: Emulsion Aggregation LGK: Low Gloss Kuro (Black)

### TRANSFER UNIT WITH HIGH IMAGE QUALITY DESIGN

The design of the driver mechanism of the transfer belt and the introduction of a large diameter driving/transfer rolls ensure stability in paper transport speed in the transfer process\*. This provides a consistent paper transport speed for paper ranging from light to stiff paper. Also, optimal toner can be transferred on paper from lightweight to heavyweight at all time with a mechanism automatically adjusting contact pressure between the transfer belt and photoreceptor drum, giving high image quality and sharper text.

\* The process that transfers toner on paper from the photoreceptor to form images.

### ULTRA HIGH PRECISION REGISTRATION - IRECT\*

This digital image registration control technology "IRect\*" precisely measures the position of sheets running in high-speed and realises real time correction to misregistration of printing images and distortion on each sheet with ultra high precision registration, which cannot be achieved by mechanical correction technology alone.

\* Image Registration Control Technology

### MAINTAIN PRINTING QUALITY WITH EASY ADJUSTMENT

Simple Image Quality Adjustment (SIQA), which realises simple alignment adjustments has been installed. For optimal adjustment, you can just print and scan the calibration chart. It ensures consistent printing quality with properly adjusted print position, perpendicularity, skew and magnification on both the front and back sides.

### MORE SCREEN CHOICES

Various screen settings\*<sup>1</sup> including FM screen that suppresses moire\*<sup>2</sup> are now available.

\*1: PCL Driver: 6 screens, PostScript® Driver: 12 screens, Print Server driver: 10 screens.

\*2: A phenomenon in which streaks not existing on the original appear when repeatedly printing patterns at regular intervals.



141 Line (AM Screen)


Stochastic Screen (FM Screen)

### IMAGE ENHANCEMENT IN A MORE BEAUTIFUL WAY

Higher image quality has been implemented with "Edge Enhancement" that fixes jaggedness on the edge of thin line and text outline and "Adjust Invert Text/Line Weight" that fixes thickened/blurred text.

Note: Default setting: OFF

Adjust Invert Text/Line Weight is ON (8 pt character)




Fixed thickened text

Fixed blurred text

### NO MORE MISSING, DUPLICATED, AND MIXED BLANK PAGES

The multifeed detection sensor monitors the paper flow to prevent the feeding of multiple sheets of paper. If a multifeed is detected, printing is interrupted to prevent blank page insertion.

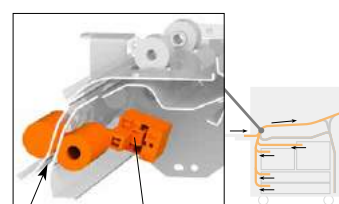

Paper transport Multifeed detection sensor

Monitors paper thickness

Note: The multifeed detection feature is not available on B9100 Copier/Printer.

# Versatility

## A wider range of media types and finishes.

### MEDIA HANDLING CAPABILITIES

This device can handle a wide range of paper weights from lightweight paper of 52 gsm to heavyweight paper of 350 gsm. The upper limit of heavyweight paper has been extended thanks to the review of the paper path design, and employing the control mechanism that automatically switches fusing roll pressure between two levels. Not only that, it allows fine control to extend the support range of coated paper and specialty paper\*1. Paper sizes ranging from A6 to 330.2 x 488 mm are available. Full-bleed printing on SRA3 (320 x 450 mm) is also possible and it is useful to create brochures or leaflets that need to have bleed. Further, banner printing on long paper of up to 660.4 mm is now available.\*2 This is useful to create booklet covers that require larger paper.

\*1: Please contact our sales representative for inquiries about capability with specialty paper.

\*2: When using long paper, High Capacity Feeder C4-DS is required for paper feed, and High Capacity Stacker A1, Finisher D6, or Finisher D6 with Booklet Maker is required for paper output.

Note: Performance is not guaranteed for all paper media. Contact our sales representative for available paper types.

### FLEXIBLE FEEDING AND FINISHING OPTIONS


These options make it possible to build flexible printing systems suited to every printing operation.

Note: The photo shows Finisher D6 with Booklet Maker 7.

SquareFold® Trimmer D1 8 cannot be connected to Finisher D6 6.

### PRINTING WITH RIGHT SETTINGS FOR EACH MEDIA TYPE

A maximum of 40 paper types can be registered with "Custom Paper Settings". It allows configuration settings such as alignment, fold position, fusing temperature according to paper to be used and produce printout with high image quality.

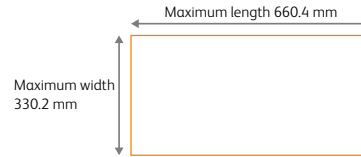

### Feeding options

Up to a total of 8050 sheets can be loaded. You can enjoy long-time seamless operation at continuous mass printing with less paper refill frequency.



High Capacity Feeder C1-D1\*1  
High Capacity Feeder C1-D2\*2  
\*1: For B9125 / B9110 / B9100 Copier/Printer  
\*2: For B9136 Copier/Printer  
Maximum A4 x 2 trays  
2000 sheets x 2 trays



Oversized High-Capacity Feeder  
Maximum A3, 330.2 x 488 mm  
2000 sheets x 1 tray  
Air assist



High Capacity Feeder C4-DS  
Maximum A3, 330.2 x 488 mm  
2000 sheets x 2 trays  
Air assist

### Supported models

	B9136 Copier/Printer	B9125 Copier/Printer	B9110 Copier/Printer	B9100 Copier/Printer
High Capacity Feeder C1-D1		●	●	●
High Capacity Feeder C1-D2	●			
Oversized High-Capacity Feeder		●	●	●
High Capacity Feeder C4-DS	●	●	●	

### Finishing options

Expanded applications with combined options.

- 1 **Interface Decurler Module D1\*1**  
-Real-time paper curl correction
- 2 **Insertion D1**  
-Cover/sheet insertion
- 3 **High Capacity Stacker A1\*2**  
-5000-sheet offset-stacking for mass printing  
-Stacker cart
- 4 **Crease/Two-sided Trimmer D2\*2**  
-Two-sided trim  
-Crease
- 5 **Folder Unit CD2**  
-Z fold half sheet/Tri-fold
- 6 **Finisher D6**  
-100-sheet stapling with auto staple cutting  
-2-hole/4-hole punch\*3, 2-hole/3-hole punch\*3
- 7 **Finisher D6 with Booklet Maker**  
-100-sheet stapling with auto staple cutting  
-2-hole/4-hole punch\*3, 2-hole/3-hole punch\*3  
-Saddle stitch/Single fold
- 8 **SquareFold® Trimmer D1\*2\*4**  
-Face trim  
-Square fold
- 9 **Simple Catch Tray\*5**
- 10 **Offset Catch Tray\*5**

\*1: Necessary for connecting High Capacity Stacker A1.


\*2: Not available on B9100 Copier/Printer.

\*3: Optional.

\*4: Available only with Finisher D6 with Booklet Maker.

\*5: Optional products for B9100 Copier/Printer.

### A variety of finishing features

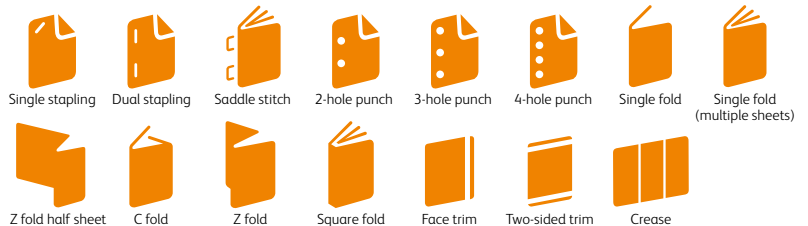

### Continuous mass printing enabled

High Capacity Stacker A1 can accommodate up to 5000 sheets. The printed sheets are directly delivered to the stacker cart (carriage). It is useful when carrying large volumes of printouts to off-line post-processing devices.



# Image Processing

Fuji Xerox developed print server with high resolution and fast processing.

## PRINT SERVER WITH HIGH IMAGE QUALITY AND HIGH-SPEED

The GX Print Server with 64-bit architecture delivers high speed RIP and high image quality, achieved through the latest hardware and image processing technologies cultivated in the development of colour production printers.



## IMAGE DATA PROCESSING MAXIMISING PRINT ENGINE PERFORMANCE

High quality image data can be generated with RIP processing of 600 x 600 dpi and 8 bit (256 gradation levels) on the Print Server. In addition, high resolution and smooth screen image of 2400 x 2400 dpi can be generated on the device with Fuji Xerox unique HQ digital screen technology (MACS\*) employed. These data processing technologies have realised high image quality brought from the maximisation of the print engine performance.

\* Micro Accurate Control Screen.

## SUPPORTING APPE\* PERFECT FOR PDF OUTPUT

APPE directly rips PDF data. Even a PDF file with transparency or layers can be processed as it is and faster and high quality output is possible. Blur, drop shadow and glow effect can be used with ease.

\* Adobe® PDF Print Engine

Note: APPE is available for jobs in PDF and JDF formats.

## PRINT SERVER EQUIPPED WITH HIGH-SPEED TECHNOLOGIES

- Faster processing with less data volume  
Fuji Xerox's unique intermediate data format streamlines RIP processing with high image quality. In the conventional RIP processing, calculation takes a long time due to large data volume. However, this new RIP processing automatically identifies objects including text and image and processes them in the format in which data volume is less. It greatly reduces the processing time without degrading image quality.
- High-speed serial transmission  
The print server sends huge raster data to the printer with a wideband transmission of 4.25 Gbps. It ensures high reliability by automatically detecting and correcting errors.

## ON-DEMAND PRINT

This feature allows you to print documents in an easy way when necessary as print information including paper type, 1-sided/2-sided, stapling is saved along with print data.

## FLEXIBLY MEETING VARIOUS PREPRESS NEEDS

FreeFlow Makeready®, software which streamlines prepress operations allows you to construct a digital printing system to handle both digital and paper document entries. This system makes it possible to use a wide range of editing functions such as imposition and labeling while checking page layout.

Note: Optional software FreeFlow Makeready® is required.

## HIGH-SPEED, LARGE VOLUME PRINTING OF VARIABLE DATA

High-speed, large volume printing of personally customised documents: direct mails, bills, usage details statements, etc. is enabled. It meets the business needs of One to One marketing which captures diversifying customers' individual needs. With industry standard PPML\*1, PDF/VT-1, and PDF/VT-2, languages for variable data printing and Fuji Xerox unique language VIPP\*2 are supported to establish extended variable printing systems.

\*1: PPML: Personalized Print Markup Language

\*2: VIPP: Variable Information Production Printware

Optional software FreeFlow® VI Compose is required.

## BUILDING JDF WORKFLOW


JDF\*1, which is the standard in the printing industry is supported. Linking with integrated workflow systems for printing operation\*2, you can build a hybrid workflow with offset printing device and digital printer.

\*1: JDF: Job Definition Format

\*2: Linked with "FUJIFILM WORKFLOW XMF" of Fujifilm Corporation and "EQUIOS" and "TrueFlow SE" of SCREEN Graphic Solutions Co., Ltd.

## STREAMLINED PRINT WORKFLOW


The efficiency of printing operation can be improved by grouping jobs having the same properties. It brings improved productivity and shorter turnaround with short-run printing of a wide variety of contents.

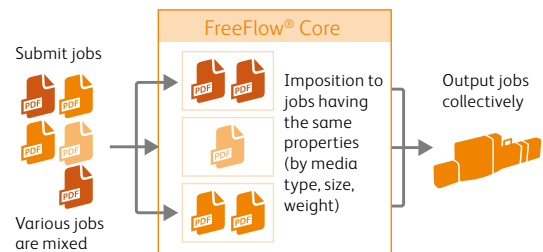

Note: Optional software FreeFlow® Core is required.

## STREAMLINED BOOKLET MAKING LINKING WITH OFF-LINE POST-PROCESSOR

The efficiency of booklet making operation can be improved by using barcodes for post-processor.

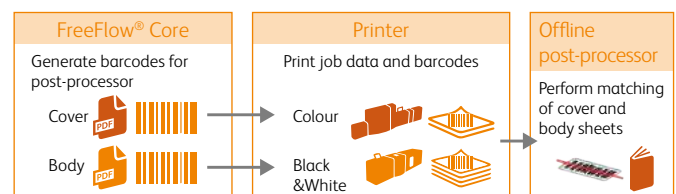



Note: Optional software FreeFlow® Core is required.

## Office

Various features for office needs.

### DUPLEX AUTOMATIC DOCUMENT FEEDER


It scans the front and back sides of the original simultaneously. Scan functions make it possible to read documents in high-speed of 135 ppm for 1 sided and 270 ppm\* for 2 sided.

	1 sided 	2 sided 
Scan job*	135 ppm (Colour/BW)	270 ppm (Colour/BW)
Copy job	100 ppm (BW)	

\* Fuji Xerox Standard scan sheet (A4 LEF), 200 dpi, to Folder

### SERVER-LESS ON-DEMAND PRINTING

Even if the device you selected for output is occupied, you can print your documents from another available device on the network.

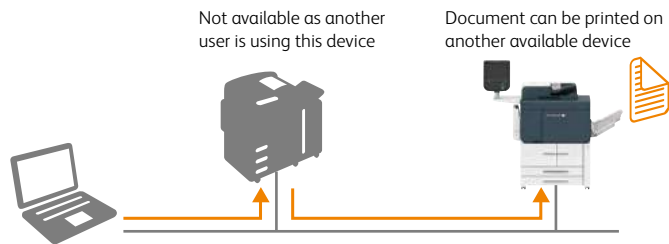


Note: Optional Server-less On-demand print and Embedded IC Card Reader A or Embedded IC Card Reader B are required. Use Multi-model Print Driver 2.

### A WIDE VARIETY OF SCAN FUNCTIONS

The following useful scan functions are available.

-Store to USB <sup>*1</sup>	-Store to Folder <sup>*2</sup>
-Scan to PC <sup>*3</sup>	-E-mail
-Job Flow <sup>*4</sup>	

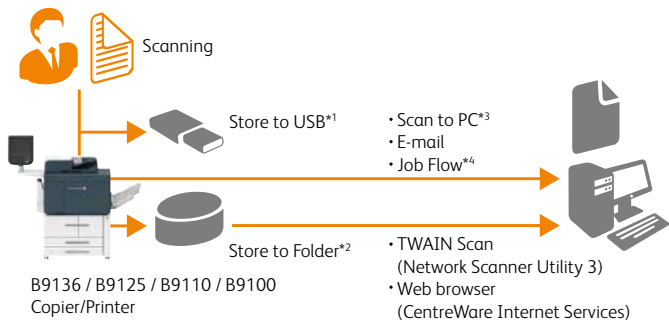

\*1: Optional USB Hub and USB Memory Kit are required.

\*2: Scanned files are stored to Folders on the device. To store them to PC, use web browsers, Stored File Manager 3 belonging to Network Scanner Utility 3, or TWAIN compliant applications.

\*3: Scanned files are sent and stored to PC folders via FTP transfer or SMB.

\*4: Scanned files are sent to defined destinations. You need to create a job flow in advance in which distribution destinations are specified.

## Security & Management

Reliable maintenance support and security management.

### REMOTE SERVICE

#### ● Preventive maintenance

Check-up and parts replacement can be performed at the perfect time by analysing the system log, and it prevents troubles.

#### ● Swift trouble resolution

If a problem occurs, Fuji Xerox service engineer will remotely analyse the system log and provide technical supports to solve the problem in a short time period. In addition, Fuji Xerox operator assists the troubled customer by sharing the print server screen remotely to solve the problem.

Note: You need to apply for Remote Service (free) to use it.

### SECURITY SUPPORT FOR PRINT DATA

Important print data provided by customers can be protected from data breaches by completely erasing\*<sup>1</sup> deleted data remaining in the print server so that the data cannot be recovered even with data recovery software. Besides, data in the printer can be encrypted\*<sup>1</sup> or completely deleted\*<sup>2</sup> to prevent unauthorised access.

\*1: Default setting: OFF

\*2: Optional.

### AUTHENTICATION

Authentication features prevent unauthorised use of the device for security. Authentication operations can be performed at the device control panel or with a smart card\*. User information can be saved and managed on the device or remote authentication server such as Active Directory®.

\* Optional Embedded IC Card Reader A or Embedded IC Card Reader B is required.

### SERVER-LESS AUTHENTICATION

When using authentication features without setting up an authentication server, it is troublesome and hard to manage with many devices as user information needs to be registered with each device. The "Server-less Authentication" feature allows authentication operations on any device as devices automatically synchronise user information.

Note: This feature is available when the print server is not connected. Optional.

## Copy On Demand

On-demand printing of copy document

### EASY REPRINTING OF COPY DOCUMENTS

This feature stores copy documents in the [Copy & Print Jobs] Folder of the device. You can print them as many times as you wish without scanning documents each time. Besides edit operations such as duplication of document data, change of copy settings, document merge like insertion and re-saving are available.

Note: "Back-Up Tool for restored document" is provided on the Fuji Xerox website.

"Migration Tool for Restored Document" is also available for exporting documents in the boxes of conventional D136 / D125 / D110 / D95 Series to these new models.

# B9136 / B9125 / B9110 / B9100 Copier/Printer Functions & Specifications

## Basic Specifications / Print Function

Item	Description			
	B9136 Copier/Printer	B9125 Copier/Printer	B9110 Copier/Printer	B9100 Copier/Printer
Printing Resolution	2400×2400 dpi			
Continuous Print Speed <sup>*1</sup>	A4	136 ppm	125 ppm	110 ppm
	A3	68 ppm	62 ppm	55 ppm
Paper Size <sup>*2</sup>	Tray 1, 2	Standard Size: Max A4, Min JIS B5		
	Tray 3, 4	Standard Size: Max A3, SRA3 (320×450 mm), Min A5 Custom Size: 139.7×182 mm to 330.2×488 mm		
	Bypass Tray <sup>*3</sup>	Standard Size: Max A3, SRA3 (320×450 mm), Min A6 Custom Size: 100×148 mm to 330.2×488 mm		
Paper Weight	Tray 1, 2, 3, 4	52 to 216 gsm		
	Bypass Tray <sup>*3</sup>	52 to 350 gsm		
Paper Tray Capacity <sup>*4</sup>	Standard	4050 sheets (1100 sheets+1600 sheets+550 sheets×2-tray+Bypass Tray 250 sheets)		
	Optional	High Capacity Feeder C1-D2: 2000 sheets×2 High Capacity Feeder C4-DS: 2000 sheets×2	High Capacity Feeder C1-D1: 2000 sheets ×2 Oversized High Capacity Feeder: 2000 sheets×1 High Capacity Feeder C4-DS: 2000 sheets×2	High Capacity Feeder C1-D1: 2000 sheets ×2 Oversized High Capacity Feeder: 2000 sheets×1
	Max	8050 sheets [Standard+ High Capacity Feeder C1-D2 or High Capacity Feeder C4-DS]	8050 sheets [Standard+ High Capacity Feeder C1-D1 or High Capacity Feeder C4-DS]	8050 sheets [Standard+ High Capacity Feeder C1-D1]
Output Tray Capacity	Depends on the spec. of output option			
Power Supply	AC200-240 V +/- 10 %, 15 A, 50/60 Hz common			
Maximum Power Consumption	3.6 kW			
Dimensions <sup>*5</sup>	W 1269×D 804×H 1477 mm			
Weight <sup>*6</sup>	265 kg			

\*1: Print speed may be reduced depending on conditions of output data and other reasons. \*2: Image loss width (326×486 mm or smaller paper) : PCL Printer Driver (Margins: Standard) 4.1 mm for all edges, GX Print Server 3.0 mm for all edges  
\*3: When High Capacity Feeder C4-DS is not connected. \*4: 80 gsm paper. \*5: Main unit only. Excludes output tray. Bypass Tray is closed. Includes operation panel. \*6: Excludes toner cartridge.

## Internal Controller

Item	Description	
Type	Internal	
Continuous Print Speed	Depends on the Basic Specifications / Print Function	
Printing Resolution	[PCL Driver] Standard: 2400×2400 dpi, High Resolution: 2400×2400 dpi [Adobe® PostScript® 3™ Driver] Standard: 2400×2400 dpi, High Resolution: 2400×2400 dpi	
Page Description Language	PCL, Adobe® PostScript® 3™	
Supported Operating System	[PCL Driver] Windows® 10 (32 bit), Windows® 10 (64 bit) Windows® 8.1 (32 bit), Windows® 8.1 (64 bit) Windows® 7 (32 bit) [Service Pack 1], Windows® 7 (64 bit) [Service Pack 1] Windows Server® 2016 (64 bit), Windows Server® 2012 R2 (64 bit) Windows Server® 2012 (64 bit) Windows Server® 2008 R2 (64 bit) [Service Pack 1] Windows Server® 2008 (32 bit) [Service Pack 2] Windows Server® 2008 (64 bit) [Service Pack 2] [Adobe® PostScript® 3™ Driver] Windows® 10 (32 bit), Windows® 10 (64 bit) Windows® 8.1 (32 bit), Windows® 8.1 (64 bit) Windows® 7 (32 bit) [Service Pack 1], Windows® 7 (64 bit) [Service Pack 1] Windows Server® 2016 (64 bit), Windows Server® 2012 R2 (64 bit) Windows Server® 2012 (64 bit) Windows Server® 2008 R2 (64 bit) [Service Pack 1] Windows Server® 2008 (32 bit) [Service Pack 2] Windows Server® 2008 (64 bit) [Service Pack 2] macOS 10.13 / 10.12, OS X 10.11 / 10.10 / 10.9 / 10.8 [Mac OS X Driver] macOS 10.13 / 10.12, OS X 10.11 / 10.10 / 10.9 / 10.8	
Interface	Standard	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-Tx1, USB2.0×1
	Optional	[Secondary Ethernet] Ethernet 1000BASE-T / 100BASE-TX / 10BASE-Tx1

## Scan Function

Item	Description
Scan Resolution	600×600 dpi, 400×400 dpi, 300×300 dpi, 200×200 dpi
Scan Speed	Same as the "Scan Speed" for the Duplex Automatic Document Feeder
Scanning Method	Store to folder (TWAIN interface support), Scan to PC, Scan to e-mail

## Copy Function

Item	Description
Scan Resolution	600×600 dpi
Printing Resolution	600×600 dpi, Equivalent to 2400×2400 dpi <sup>*1</sup>
First Copy Output Time	3.9 sec (A4) <sup>*2</sup>

\*1: When the Image Enhancement feature is enabled. \*2: When the original is set on the document glass and copies are output to the output tray of Finisher D6 or Finisher D6 with Booklet Maker.

## Offset Catch Tray (Optional)

Item	Description
Paper Size	Standard Size: Max A3, SRA3 (320×450 mm), Min A6 Custom Size: 100×148 mm to 330.2×488 mm
Paper Weight	52 to 300 gsm
Paper Capacity <sup>*1</sup>	500 Sheets

Note: This is an option for B9100 Copier/Printer. \*1: 64 gsm paper.

## Duplex Automatic Document Feeder

Item	Description	
Original Size / Paper Weight	Max: A3, 11×17", Min: A6 <sup>*1</sup> 38 to 200 gsm (In Duplex: 50 to 200 gsm)	
Capacity <sup>*2</sup>	250 sheets	
Scan Speed	Copy	100 ppm (A4 LEF, 1 Sided)
	Scan	1 sided: 135 ppm, 2 sided: 270 ppm [Fuji Xerox Standard Paper (A4), 200 dpi, to Folder.]

\*1: 84×139.7 mm for custom size \*2: 64 gsm paper.

## Print Server [GX Print Server for the B9 Series]

Item	Description
Type	External
CPU	Intel® Core™ i3 6100 Processor 3.7 GHz
Storage device	Hard disk: 1 TB, DVD Multi drive
Memory capacity	16 GB (Max 16 GB)
Server Operation System	Windows® 10 IoT Enterprise (64 bit)
Page Description Language	Adobe® PostScript® 3™, PDF/VT-1, PDF/VT-2, PPML, VIPP <sup>*1</sup>
Print Data Format	PS, PDF1.7, PDF/X-1a, PDF/X-3, PDF/X-4, PDF/X-5, EPS, TIFF, JPEG
Supported Operating System	Windows® 10 (32 bit), Windows® 10 (64 bit) Windows® 8.1 (32 bit), Windows® 8.1 (64 bit) Windows® 7 (32 bit) [Service Pack 1] Windows® 7 (64 bit) [Service Pack 1] Windows Server® 2016 (64 bit), Windows Server® 2012 R2 (64 bit) Windows Server® 2012 (64 bit) Windows Server® 2008 R2 (64 bit) [Service Pack 1] Windows Server® 2008 (32 bit) [Service Pack 2] Windows Server® 2008 (64 bit) [Service Pack 2] macOS 10.13 / 10.12, OS X 10.11 / 10.10 / 10.9
Interface	Ethernet 1000BASE-T / 100BASE-TX / 10BASE-Tx2, USB3.0×6, USB2.0×2
Network Protocol	TCP/IP (lpr / FTP / IPP <sup>*2</sup> / SMB / HTTP), AppleTalk <sup>*3</sup> , Bonjour
Power Supply	AC100-240 V +/- 10 %, 2.5 A (100 V) / 1.1 A (240 V), 50/60 Hz common
Maximum Power Consumption	0.2 kW
Dimensions <sup>*4</sup>	W 135×D 300×H 315 mm
Weight <sup>*4</sup>	6.8 kg

\*1: Used with optional software FreeFlow® VI Compose. \*2: Used to work with FreeFlow® Digital Workflow Collection. \*3: AppleTalk is not supported by Mac OS X 10.6 or later. \*4: Print Server only. Excludes LCD monitor, keyboard, and mouse.

## Finisher D6 / Finisher D6 with Booklet Maker (Optional)

Item	Description		
	Finisher D6	Finisher D6 with Booklet Maker	
Type	Output Tray	Sort / Stack	
	Finishing Tray	Sort (Offset available) / Stack (Offset available)	
	Booklet Tray	- / Sort / Stack	
Paper Size	Output Tray	Standard Size: Max A3, SRA3 (320×450 mm), Min A6 Custom Size: 100×148 mm to 330.2×660.4 mm	
	Finishing Tray	Standard Size: Max A3, SRA3 (320×450 mm), Min A5 Custom Size: 148×148 mm to 330.2×488 mm	
Paper Weight	Output Tray	52 to 350 gsm	
	Finishing Tray	52 to 350 gsm	
Paper Capacity <sup>*1</sup>	Output Tray	500 Sheets (A4)	
	Finishing Tray	[Without Stapling] A4: 3000 sheets JIS B4 or larger: 1500 sheets Mixed Size Stacking <sup>**</sup> : 350 sheets [With Stapling] A4: 200 sets or 3000 sheets JIS B4 or larger: 100 sets or 1500 sheets	[Without Stapling] A4: 2000 sheets JIS B4 or larger: 1500 sheets Mixed Size Stacking <sup>**</sup> : 350 sheets [With Stapling] A4: 200 sets or 2000 sheets JIS B4 or larger: 100 sets or 1500 sheets
		Booklet Tray	-
Staple	Capacity	100 sheets <sup>*4</sup> (90 gsm or less)	
	Paper Size	Standard Size: Max A3, Min JIS B5 Custom Size: 182×148 mm to 297×431.8 mm	
	Paper Weight	52 to 300 gsm	
Punch <sup>*6</sup>	Paper Size	Position Single Stapling <sup>*5</sup> , Dual stapling	
		Number of Holes <sup>*7</sup> 2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)	
		Standard Size: 2-hole punch: JIS B5, A4, JIS B4, A3 3-hole punch: JIS B5, A4, JIS B4, A3 4-hole punch: A4, A3 Custom Size: 2-hole punch: 203.2×182 mm to 297×431.8 mm 3-hole punch: 254×182 mm to 297×431.8 mm 4-hole punch: 267×182 mm to 297×431.8 mm	
Booklet Finishing	Capacity <sup>*8</sup>	- / Saddle Staple: 30 sheets, Single fold: 5 sheets	
	Paper Size	- / Standard Size: Max A3, SRA3 (320×450 mm), Min JIS B5 Custom Size: 182×257 mm to 330.2×488 mm	
	Paper Weight	- / 52 to 300 gsm	
Power Supply	AC100-240 V +/- 10 %, 2.4-3.0 A (100 V) / 1.5-1.8 A (240 V), 50/60 Hz common		
Maximum Power Consumption	300 W		
Dimensions	W 855×D 725×H 1200 mm		W 892×D 725×H 1200 mm
Weight	85 kg		105 kg

Note: Inserter D1 is necessary for connecting Finisher D6 or Finisher D6 with Booklet Maker without connecting High Capacity Stack A1.

\*1: 64 gsm paper. \*2: When larger size sheets are stacked on top of smaller size sheets. \*3: Booklet tray capacity is 20 sets (16 sheets bind and below), 16 sets (17 to 20 sheets bind), 12 sets (21 to 25 sheets bind) and 10 sets (26 to 30 sheets bind). \*4: 65 sheets for sizes angled stapling is supported on A4 and A3 only. \*5: Optional. \*6: The possible number of holes depends on the paper size. \*7: The capacity can decrease depending on type and weight of paper being used and other conditions.

## B9136 / B9125 / B9110 / B9100 Copier/Printer Functions & Specifications

### Folder Unit CD2 (Optional)

Item	Description	
Z Fold Half Sheet	Paper Size	A3, JIS B4
	Paper Weight	52 to 105 gsm
Tri-fold	Paper Size	A4
	Paper Weight	52 to 105 gsm
	Paper Capacity <sup>1</sup>	30 sheets
Power Supply	AC100-240V +/- 10 %, 0.8-1.0A (100V) / 0.5-0.6A (240V), 50/60Hz common	
Maximum Power Consumption	100 W	
Dimensions	W 232xD 726xH 992 mm	
Weight	55 kg	

Note: This is an option for Finisher D6 and Finisher D6 with Booklet Maker. \*1: 64 gsm paper.

### High Capacity Stacker A1 (Optional)

Item	Description	
Paper Capacity <sup>1</sup>	Output Tray	500 sheets
	High Capacity Stacker - Stacker Cart	5000 sheets
Paper Size	Output Tray	Standard Size: Max A3, SRA3 (320x450 mm), Min A6 Custom Size: 100x148 mm to 330.2x660.4 mm
	High Capacity Stacker - Stacker Cart	Standard Size: Max A3, SRA3 (320x450 mm), Min JIS B5 Custom Size: 203x148 mm to 330.2x488 mm
Paper Weight	Output Tray	52 to 350 gsm
	High Capacity Stacker - Stacker Cart	52 to 350 gsm
Power Supply	AC100-240V +/- 10 %, 1.18-1.5A (100V) / 0.8-0.96A (240V), 50/60Hz common	
Maximum Power Consumption	150 W	
Dimensions	W 800xD 725xH 1042 mm	
Weight	155 kg	

Note: This is an option for B9136 / B9125 / B9110 Copier/Printer. \*1: 64 gsm paper.

### Crease/Two-sided Trimmer D2 (Optional)

Item	Description	
Two-sided Trim	Paper Size	Standard Size: Max A3, SRA3 (320x450 mm), Min A4 Custom Size: 194x210 mm to 330.2x488 mm
	Paper Weight	52 to 350 gsm
	Trim Dimensions	One side 6 to 25 mm
Crease	Paper Size	Standard Size: Max A3, SRA3 (320x450 mm), Min JIS B5 Custom Size: 182x210 mm to 330.2x488 mm
	Paper Weight	Saddle staple / Single fold: 52 to 350 gsm Single sheet with no folding: 157 to 350 gsm
	Number of lines	1 to 5
Power Supply	AC100-240V +/- 10 %, 3.15-4.0A (100V) / 2.0-2.4A (240V), 50/60Hz common	
Maximum Power Consumption	400 W	
Dimensions	W 605xD 725xH 992 mm	
Weight	128 kg	

Note: This is an option for Finisher D6 or Finisher D6 with Booklet Maker. This is an option for B9136 / B9125 / B9110 Copier/Printer.

### Interface Decurler Module D1 (Optional)

Item	Description
Power Supply	AC100-240V +/- 10 %, 1.97-2.5A (100V) / 1.0-1.2A (240V), 50/60Hz common
Maximum Power Consumption	250 W
Dimensions	W 340xD 725xH 992 mm
Weight	40 kg

Note: This option is necessary for connecting High Capacity Stacker A1. This is an option for B9136 / B9125 / B9110 Copier/Printer.

- To comply with paper weight specifications, it is recommended to use Fuji Xerox recommended paper. Document may not be printed correctly depending on usage conditions.
- Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies. The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

**Reproduction Prohibitions** Please note that reproduction of the following is prohibited by law : Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. Unused postage stamps, post cards, etc. Certificate stamps stipulated by law. Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

For more information or detailed product specification, please call or visit us at  
**Fuji Xerox Asia Pacific Pte. Ltd. (Malaysia Operations)**

#### Head Office:

Level 23, 23A & 25, Menara Binjai, No.2, Jalan Binjai, 50450 Kuala Lumpur.  
 Tel: 03-2191 1888 Fax: 03-2191 1818 Hunting Line: 1-300-88-5880

#### Service & Logistic Operations Office:

Ground & 1st Floor, No.10, Jalan Bersatu 13/4, 46200 Petaling Jaya, Selangor Darul Ehsan.  
 Tel: 03-2191 1888 Fax: 03-7882 2769 (Service), 03-7882 2637 (Logistic)

#### Sales Office and Showroom:

Galeria PJH, Unit 8, Level 1, Jalan P4W, Presint 4, Persiaran Perdana, 62100 Putrajaya.  
 Tel: 03-8888 2998 Fax: 03-8888 2689

<https://www.fujixerox.com.my/>

Xerox, Xerox and Design, as well as Fuji Xerox and Design, FreeFlow, FreeFlow Makeready, SquareFold, CentreWare and VIPP are registered trademarks or trademarks of Xerox Corporation in Japan and/or other countries.

### SquareFold® Trimmer D1 (Optional)

Item	Description
Paper Size	Same as the paper size of the Finisher D6 Booklet Finishing.
Paper Weight	Same as the paper weight of the Finisher D6 Booklet Finishing.
Booklet Tray Capacity <sup>1</sup>	20 sets (16 sheets bind and below), 16 sets (17 to 20 sheets bind), 12 sets (21 to 25 sheets bind), 10 sets (26 to 30 sheets bind)
Face Trim	Capacity <sup>2</sup> : Saddle Staple: 30 sheets, Single fold: 5 sheets Trim Dimensions: 2 to 20 mm
Square Fold Capacity <sup>2+3</sup>	30 sheets
Power Supply	AC100-240V +/- 10 %, 0.63-0.8A (100V) / 0.4-0.48A (240V), 50/60Hz common
Maximum Power Consumption	80 W
Dimensions	W 1066xD 725xH 552 mm
Weight	100 kg

Note: This is an option for Finisher D6 with Booklet Maker. This is an option for B9136 / B9125 / B9110 Copier/Printer. \*1: Paper may not be accepted depending on paper type and other usage conditions. \*2: Square folding is not supported for Single folding and saddle stapling of less than 5 sheets. \*3: The capacity can decrease depending on type and weight of paper being used and other conditions.

### Insertor D1 (Optional)

Item	Description
Paper Size	Standard Size: Max A3, SRA3 (320x450 mm), Min A5 Custom Size: 182x148 mm to 330.2x488 mm
Paper Weight	52 to 350 gsm
Paper Capacity <sup>1</sup>	250 sheets
Power Supply	Supplied from the Interface Decurler Module D1, Finisher D6, or Finisher D6 with Booklet Maker
Dimensions	W 700 <sup>2</sup> xD 725xH 1235 mm
Weight	45 kg

Note: Finisher D6 or Finisher D6 with Booklet Maker is required. Insertor D1 is necessary for connecting Finisher D6 or Finisher D6 with Booklet Maker without connecting High Capacity Stacker A1. Note: Cannot print on the paper loaded in Insertor D1. \*1: 64 gsm paper. \*2: The width of the paper transfer part only when connected to the device is 165 mm.

### High Capacity Feeder C1-D1 / High Capacity Feeder C1-D2 (Optional)

Item	Description	
	High Capacity Feeder C1-D1 <sup>1</sup>	High Capacity Feeder C1-D2 <sup>2</sup>
Paper Size	A4, JIS B5	A4, JIS B5
Paper Weight	52 to 216 gsm	52 to 216 gsm
Feeding Capacity / Number of Tray <sup>3</sup>	2000 sheetsx2-tray	2000 sheetsx2-tray
Dimensions	W 601xD 694xH 992 mm	W 601xD 694xH 992 mm
Weight	72 kg	72 kg

\*1: This is an option for B9125 / B9110 / B9100 Copier/Printer. \*2: This is an option for B9136 Copier/Printer. \*3: 80 gsm paper.

### Oversized High-Capacity Feeder / High Capacity Feeder C4-DS (Optional)

Item	Description	
	Oversized High-Capacity Feeder <sup>1</sup>	High Capacity Feeder C4-DS <sup>2</sup>
Paper Size	Standard Size: Max A3, SRA3 (320x450 mm), Min JIS B5 Custom Size: 210x182 mm to 330.2x488 mm	[Tray 6 and 7] Standard Size: Max A3, SRA3 (320x450 mm), Min JIS B5 Custom Size: 182x182 mm to 330.2x488 mm [Bypass Tray <sup>3</sup> ] Custom Size: 100x148 mm to 330.2x660.4 mm
Paper Weight	52 to 300 gsm	[Tray 6 and 7] 52 to 350 gsm [Bypass Tray <sup>3</sup> ] 52 to 253 gsm
Feeding Capacity / Number of Tray <sup>4</sup>	2000 sheetsx1-tray	2000 sheetsx2-tray
Power Supply	AC100-240V +/- 10 %, 3 A, 50/60 Hz common	AC100-240V +/- 10 %, 5 A, 50/60 Hz common
Maximum Power Consumption	300 W	500 W
Dimensions	W 1020xD 801xH 992 mm	W 1020xD 762xH 992 mm
Weight	111 kg	205 kg

\*1: This is an option for B9125 / B9110 / B9100 Copier/Printer. \*2: This is an option for B9136 / B9125 / B9110 Copier/Printer. \*3: Bypass Tray is detached from the printer and attached to High Capacity Feeder C4-DS. \*4: 80 gsm paper.



Adobe PostScript 3



Adobe PDF Print Engine 4



#### For Your Safety

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

**FUJI XEROX**

#### Branches:

**Penang:** No. 3-G, 3-1 & 3-2, Persiaran Bayan Indah, Bayan Bay, 11900 Bayan Lepas Penang.  
 Tel: 04-643 5000 Fax: 04-644 4677

**Johor Bahru:** No.21 & 23, Jalan Setia Tropika 1/28, Taman Setia Tropika, 81200 Kempas, Johor Bahru.  
 Tel: 07-238 7868 Fax: 07-238 2678, 07-238 2178

**Melaka:** No.17, Jalan KL3/11, Kota Laksamana, 75200 Melaka.  
 Tel: 06-281 0466 Fax: 06-281 0408

**Kota Kinabalu:** Block K, Lot 65, Ground-5th Floor, KK Time Square, 88100 Kota Kinabalu, Sabah.  
 Tel: 088-486 888 Fax: 088-486 668

**Kuching:** 199A-201, Lot 3049 & 3050, Eastmoore Centre, 2 1/2 Mile Jalan Rock, 93200 Kuching, Sarawak.  
 Tel: 082-240 633, 082-254 633 Fax: 082-418 733

**Ipoh:** C-G-3A, Greentown Square, Jalan Datuk Seri Ahmad Said, 30450 Ipoh, Perak.  
 Tel / Fax: 05-254 3668

The information is as of August, 2018. PIC-0133 M (1803-R2)